

**AB11
STARTER**

- CORE :** Polyester HT
- COVER :** Polyester HT

FIBER CHARACTERISTICS

The fiber's components of this product are : **POLYESTER HT**

- **Polyester** it's polymers produced by mixing ethylene glycol and terephthalic acid.




FIBER'S PROPERTY	UDM	POLYESTER HT	-	-	-
Tenacity	gr/den	9,3	-	-	-
Specific gravity	gr/cm ³	1,38	-	-	-
Elongation at break	%	14,6	-	-	-
Tensile modulus	gr/den	120	-	-	-
Melting point	°C	256	-	-	-

ANIMA : POLIESTERE HT



COVER MIX TECNICO : POLIESTERE HT

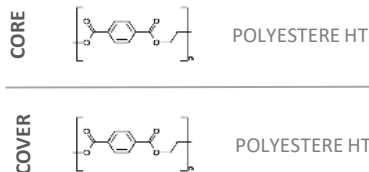

BRAID CHARACTERISTICS

CORE			COVER <small>(it's a media of the of all fiber's components)</small>		
TENACITY	9,3 gr/den		ABRASION RESISTANCE	9,3 gr/den	
CREEP	10 %		PEAK TEMP.	256 °C	
MODULE	120 gr/den		GRIP	0,1 frict. coeff.	
WEIGHT	1,38 gr/cm ³		LIGHTNESS	1,38 gr/cm ³	

DISCOUNT SYSTEM			
SHOP		WHOLESALE	
Standard lenght sc.	%	Standard lenght sc.	%
-	-	-	-
-	-	-	-

APPLICATIONS , TECHNICAL DATA , PRICE

- Small engine starter cord

Ø	weight	breacking load	standard lenght	custom lenght	Ø	white	-	-	-
mm	gr/mt	daN	mt	mt	mm	€/mt	-	-	-
3	9,4	300	200	-	3	0,228 €	-	-	-
4	12,6	390	200	-	4	0,301 €	-	-	-
5	16,9	480	200	-	5	0,387 €	-	-	-
6	23,0	690	200	-	6	0,506 €	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-

* Linear breaking load in according to DIN EN ISO 2307