


COLOR CODE

C4



CORE : IRIIDIUM (uhmwpe)

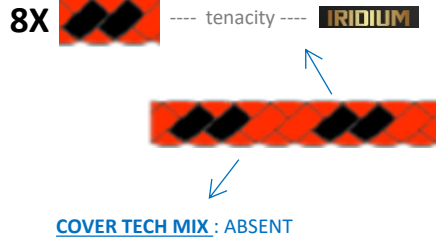

FIBER CHARACTERISTICS

The fiber's components of this product are : **IRIIDIUM**

- **Iridium** it's an ultra high molecular weight polyethylene with pigment inside fiber .



FIBER'S PROPERTY	UDM	IRIIDIUM UHMWPE
Tenacity	gr/den	36
Specific gravity	gr/cm ³	0,974
Tensile modulus	gr/den	1.140
Melting point	°C	147

BRAID CHARACTERISTICS

BRD PRO (100% IRIIDIUM) it's a super braid 100% IRIIDIUM FIBER (uhmwpe) . This special fiber it's a tecno fiber : comparing to Dyneema have about same characteristics , but this special fiber have colored pigment inside that never disappears . Have a round and compact construction with a super bereacking load and an exteme abrasione resistance. The range of colors permit to adapt look to all kind of brand identity colors or for create tactical camouflage line .

BRAID PROPERTY	UDM	CORE
Tenacity	gr/den	36,0
Creep	%	0,5
Module	gr/den	1.314
Weight	gr/cm ³	0,974

COLOR'S RANGE

COLORS AVAILABLE FOR ALL SIZE

	A	B	C	D	E	F	G
	solid color	white with colored mark	color with black mark	snake skin	black with colored mark	melange white / color	melange black / color
1	white solid color	white w/ black mark	white w/ black mark	snake white / black	black w/ white mark	melange white / black	melange black / white
2	yellow solid color	white w/ yellow mark	yellow w/ black mark	snake yellow / black	black w/ yellow mark	melange white / yellow	melange black / yellow
3	orange solid color	white w/ orange mark	orange w/ black mark	snake orange / black	black w/ orange mark	melange white / orange	melange black / orange
4	red solid color	white w/ red mark	red w/ black mark	snake red / black	black w/ red mark	melange white / red	melange black / red
5	green solid color	white w/ green mark	green w/ black mark	snake green / black	black w/ green mark	melange white / green	melange black / green
6	light blue solid color	white w/ blu mark	blu w/ black mark	snake blu / black	black w/ blu mark	melange white / blu	melange black / blu
7	black solid color						

APPLICATION

- REEL LINE		★★★★★
- SHOTING LINE		★★★★★
- WISHBONE LINE		★
- SLIP TIP LINE		★

TECHNICAL DATA , PRICE

CODE	∅	breacking load daN	weight gr/mt	MOQ 3.000 mt	∅	20 mt	30 mt	50 mt	100 mt
	mm				€/pz	€/pz	€/pz	€/pz	
	1,0	100	0,90		1,1	11,0	15,0	24,5	47,5
	1,5	130	1,40		1,5	13,5	16,5	26,5	51,5
	2,0	170	1,90		2,0	14,5	21,0	33,0	79,5

Stretch at 30% of breaking load....2,15%
Stretch at breaking load.....3,25%

* Linear breaking load in according to DIN EN ISO 2307