



COLOR CODE

D5

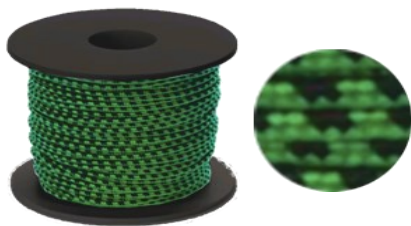

CORE : POLYESTER HT

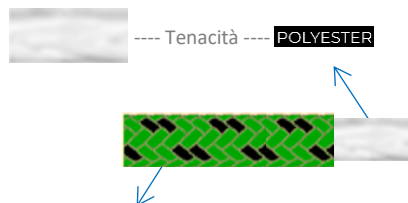

COVER TECH MIX : POLYESTER HT

16X



FIBER CHARACTERISTICS

The fiber's components of this product are : POLYESTER HT

- Polyester it's polymers produced by mixing ethylene glycol and terephthalic acid.



FIBER'S PROPERTY	UDM	POLYESTER HT
Tenacity	gr/den	9,3
Specific gravity	gr/cm ³	1,38
Tensile modulus	gr/den	120
Melting point	°C	256


BRAID CHARACTERISTICS

BRD DYNAMIC (PET HT CORE / PET HT COVER) it's a tecno braid with a core and cover in PET HT . Have a round and compact construction with an high bereacking load and and a very good abrasione resistance. The range of color's permit to adapt look to all kind of brand identity colors or for create tactical camouflage line

BRAID PROPERTY	UDM	CORE	COVER
Abrasion resistance	gr/den	9,3	9,3
Peack of temp.	°C	256	256
Grip	frict. coeff.	0,1	0,1
Weight	gr/cm ³	1,38	1,38

COLOR'S RANGE

COLORS AVAILABLE FOR ALL SIZE

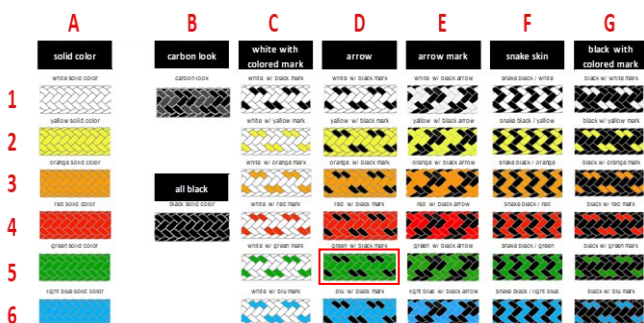

APPLICATION

- REEL LINE		★ ★ ★
- SHOTING LINE		★ ★ ★
- WISHBONE LINE		★
- SLIP TIP LINE		★

TECHNICAL DATA , PRICE

art	∅	breacking load	weight	MOQ	∅	20 mt	30 mt	50 mt	100 mt
code	mm	daN	gr/mt	3.000 mt	mm	€/pz	€/pz	€/pz	€/pz
	1	90	2,00		1	7,0	10,0	15,5	28,0
	1,5	100	2,20		1,5	8,5	11,0	17,0	39,0
	2	150	3,00		2	10,0	12,5	18,0	33,5

Stretch at 30% of breacking load.....6,90%

* Linear breaking load in according to DIN EN ISO 2307