




made in Italy

COLOR CODE

**B4**



CORE : IRIDIUM

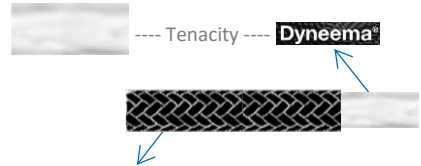

COVER TECH MIX : POLYESTER HT

16X



FIBER CHARACTERISTICS

The fiber's components of this product are : **SK78**

- **UHMWPE** it's an ultra high molecular weight polyethylene .

BRAID CHARACTERISTICS

**WISHBONE PRO** (100% IRIDIUM) it's a super line developed for realize wishbone . The core it's in Dyneema for maximize the breaking load ; the cover it's in Iridium, a fiber with same characteristic of dyneema but available in different colors .This permit to create a big range of colors maintaining an extreme abrasion resistance .

FIBER'S PROPERTY	UDM	DYNEEMA	IRIDIUM
Tenacity	gr/den	39,8	36
Specific gravity	gr/cm <sup>3</sup>	0,974	0,974
Tensile modulus	gr/den	1.314	1.314
Melt point	°C	147	147


BRAID PROPERTY	UDM	CORE	COVER
Abrasion resistance	gr/den	39,8	36
Peack of temp.	°C	256	256
Grip	frict. coeff.	0,1	0,1
Weight	gr/cm <sup>3</sup>	1,38	1,38

COLOR'S RANGE

APPLICATION

COLORS AVAILABLE FOR ALL SIZE

COLORS AVAILABLE ONLY FOR SIZE 1,8 & 2,2

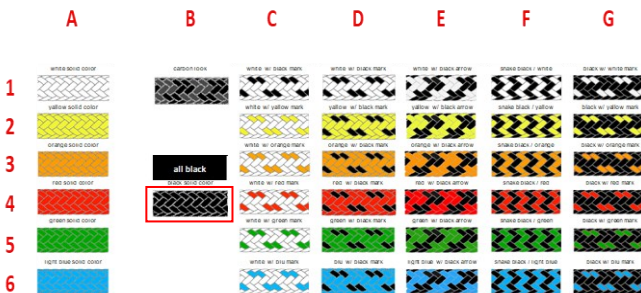

- REEL LINE		★ ★
- SHOTING LINE		★ ★ ★
- WISHBONE LINE		★ ★ ★ ★ ★
- SLIP TIP LINE		★

TECHNICAL DATA , PRICE

art code	ø mm	breacking load daN	weight gr/mt	MOQ 3.000 mt	ø	20 mt	30 mt	50 mt	100 mt
					mm	€/pz	€/pz	€/pz	€/pz
	1,8	220	1,80		1,8	23,0 €	31,0 €	47,0 €	86,0 €
	2,5	440	4,00		2,2	27,0 €	40,0 €	66,0 €	130,0 €

Stretch at 30% of breaking load....2,15%  
Stretch at breaking load.....3,25%

\* Linear breaking load in according to DIN EN ISO 2307